# XL2

## *Cross Line Laser*

The PREXISO XL2 Cross Line Laser can be used wherever accurate verticals and horizontals are required for alignment. Water-level and line drawing on walls become redundant.

***Self-levelling***
It is not necessary to align the device tediously to obtain horizontal or vertical lines.
The PREXISO XL2 compensates over a range of ± 5° automatically.

***Perfect along the line***
Whether horizontal, vertical or crossed – the red lines are a reliable reference to align everything in your room.

***Easy to use***
The PREXISO XL2 is intuitive to operate due to one button only.

***Lock-function***
Lock for projecting at any angle and transport protection.

ALIGN WITH LASER

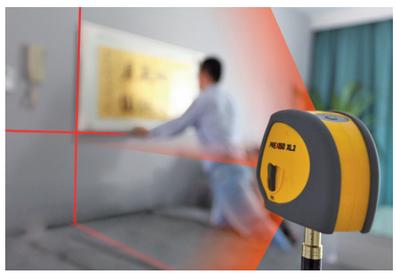

**PREXISO**

**PREXISO AG**
**www.prexiso.com**

ALIGN WITH LASER

***Scope of delivery:***

| | |
|---|---|
| Functionalities | 1 horizontal line plus 1 vertical line |
| Accuracy | ± 2 mm / 5 m |
| Working range | 10 m |
| Sensitivity range | self-levelling ± 5° |
| Fan angels of horizontal and vertical directions | greater than 130° |
| Battery | 3 AA size batteries |
| Working hours | more than 16 hours (both lines on) |
| Working temperature range | 14°F to 104°F (–10°C to +40°C) |
| Storage temperature range | –4°F to 158°F (–20°C to +70°C) |
| Laser classification | Class 2 laser |
| Dimensions | 109 × 63 × 87 mm |
| Weight | 298 g (excluding batteries) |

***Easier, faster and better:***

- Laying tiles, carpets or other flooring
- Wallpaper hanging
- Installing kitchens
- Building-up dry walls
- Installing ceilings
- Levelling or aligning any other structural elements or objects

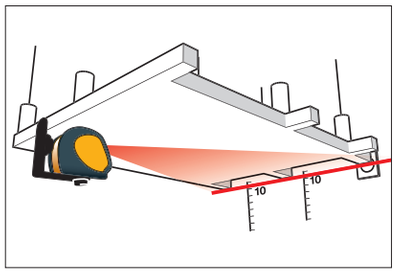


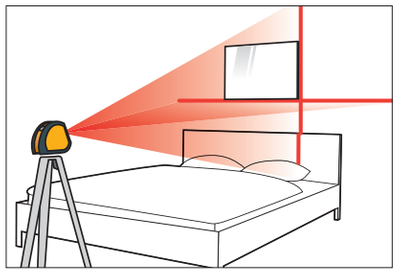

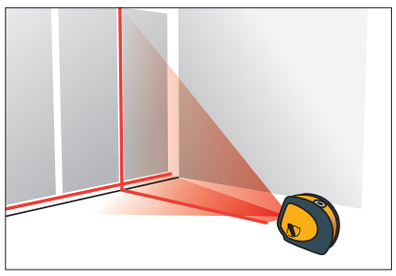

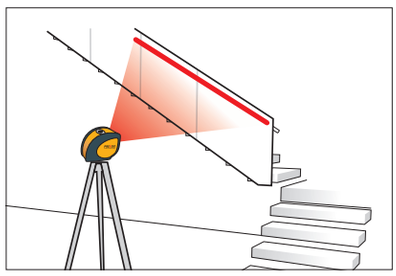

2

Laser class 2
In accordance with IEC 60825-1

All illustrations, descriptions and technical specifications are subject to change without prior notice.
Copyright Prexiso AG, Glattbrugg, Switzerland, 2011.

PREXISO

**PREXISO AG**
**www.prexiso.com**